Date: November 29, 2017

## **MALABAR**



#### **INTERNATIONAL**

## AIRCRAFT MAINTENANCE & SUPPORT EQUIPMENT

## OWNER'S MANUAL FOR MALABAR MODEL

# PF53481-132PWS

5 GALLON FLUID DISPENSER

# READ AND SAVE

THIS
INSTRUCTION
MANUAL

- \* GENERAL DESCRIPTION
- \* OPERATION
- \* SERVICE
- \* PARTS BREAKDOWN

For Service & Spare

Parts, Please Contact: Malabar International

220 W. Los Angeles Avenue Simi Valley, California 93065 Phone: (805) 581-0116 Fax: (805) 584-1624

E-mail: sales@malabar.com

Web site: http://www.malabar.com

## **OVER 65 YEARS OF SERVICE & EXPERIENCE**

© 2002 Malabar International. All rights reserved. Permission to reproduce all or part of this material must be obtained from Malabar International.

#### GENERAL DESCRIPTION, OPERATION, SERVICE AND PARTS BREAKDOWN

## MALABAR MODEL PF53481-132PWS 5 GALLON FLUID DISPENSER

CAUTION: AIRCRAFT MANUFACTURER'S SPECIFICATIONS AND

INSTRUCTIONS MUST BE FOLLOWED. IN THE EVENT OF

CONTRADICTION BETWEEN AIRCRAFT

MANUFACTURER'S SPECIFICATIONS AND MALABAR'S,

AIRCRAFT MANUFACTURER'S WILL PREVAIL.

#### **SPECIFICATIONS:**

Fluid	MOBIL JET II	
Reservoir capacity	5 U.S. gal	18.9 liters
Pump outlet pressure	100 psig	689 kPa
Volume per stroke	3.0 cubic in	49 cc
Relief valve setting		862 ± 69 kPa
Hose length	120 in	3048 mm
Net weight (empty)	35 lbs	15.9 kg
Filter rating	1 micron nominal	J
Fluid tank color	green	

#### **GENERAL DESCRIPTION:**

The Malabar Model PF53481-132PWS is a 5 gallon fluid dispenser used to service various commercial aircraft. The hand pump dispenser consists of a reservoir, pump assembly, water stop filter assembly, and a fluid delivery hose with a coupling and gravity fill adapter assembly.

#### PREPARATION FOR USE:

The unit is shipped fully assembled. Fill reservoir at fillport with approved fluid. Operate hand pump assembly a few strokes to bleed all air out of the system. The unit is now ready for use.

#### **OPERATION:**

- 1. Remove dust plug from hose coupling and connect the hose coupling to the aircraft service point.
- 2. Use full steady pumping strokes when operating pump assembly during replenishing.
- 3. Disconnect the hose coupling from the aircraft service point, replace the dust plug and store the unit in a dry, dust free location.

#### **ILLUSTRATED PARTS LIST:**


Refer to figure 1A, 1B & 1C for unit assembly (see sheets 3, 4 & 5) or figure 2 for pump assembly (see sheet 6).


#### **SERVICING:**


- 1. The frequency of filter change depends on operating conditions. Generally, changes should be made every 3-4 months or sooner if more than normal resistance is felt on the pumping stroke at low pressure. Refer to item 10 in figure 3 (see sheet 7) to change element. Proper element must be installed, otherwise unit will not pump fluid.
- 2. <u>NOTE</u>: The relief valve should not be removed. The relief is set to by-pass oil back to the reservoir at  $125 \pm 10$  PSIG.

#### **REPAIR AND REPLACEMENT:**

No definite time schedule can be established for the overhaul of the pump assembly for the replacement of the various moving parts. The number of times the pump assembly is operated materially affect the life of the working parts. The moving piston seal (item 14) and rod seal (item 15) are normally the first to wear (see sheet 6). This is usually indicated by leakage of fluid past the piston or rod. It is advisable to change piston seal (item 14) and rod seal (item 15) immediately if leakage is discovered. A repair parts kit (P/N PF5-6PK) is available and recommended to keep on hand at your facility. Refer to sheet 8 for the complete list of parts contained in the repair parts kit.

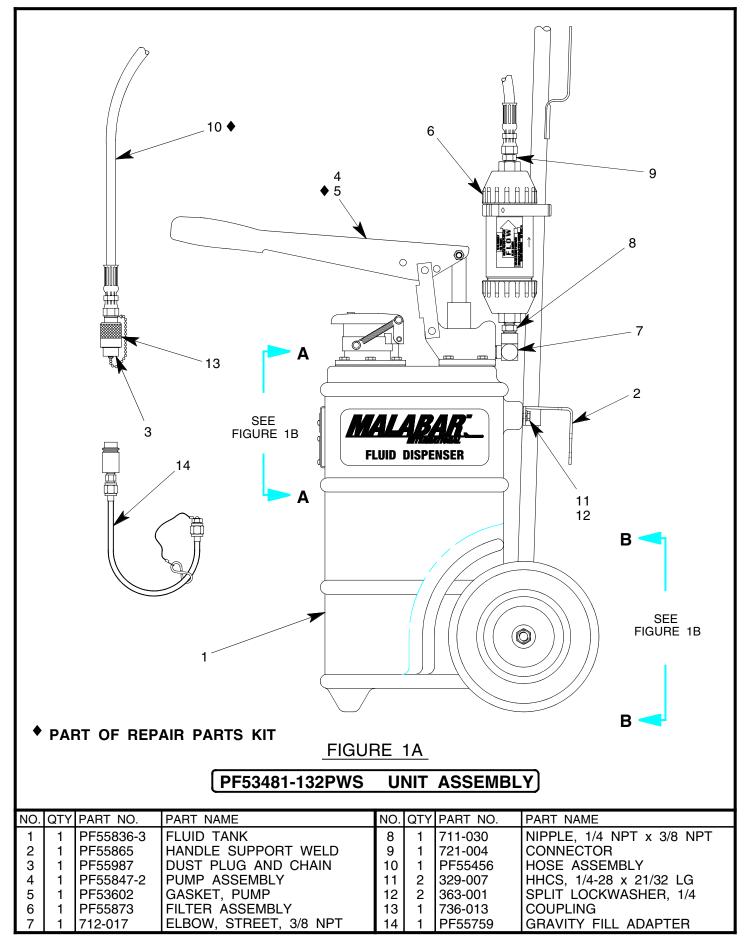

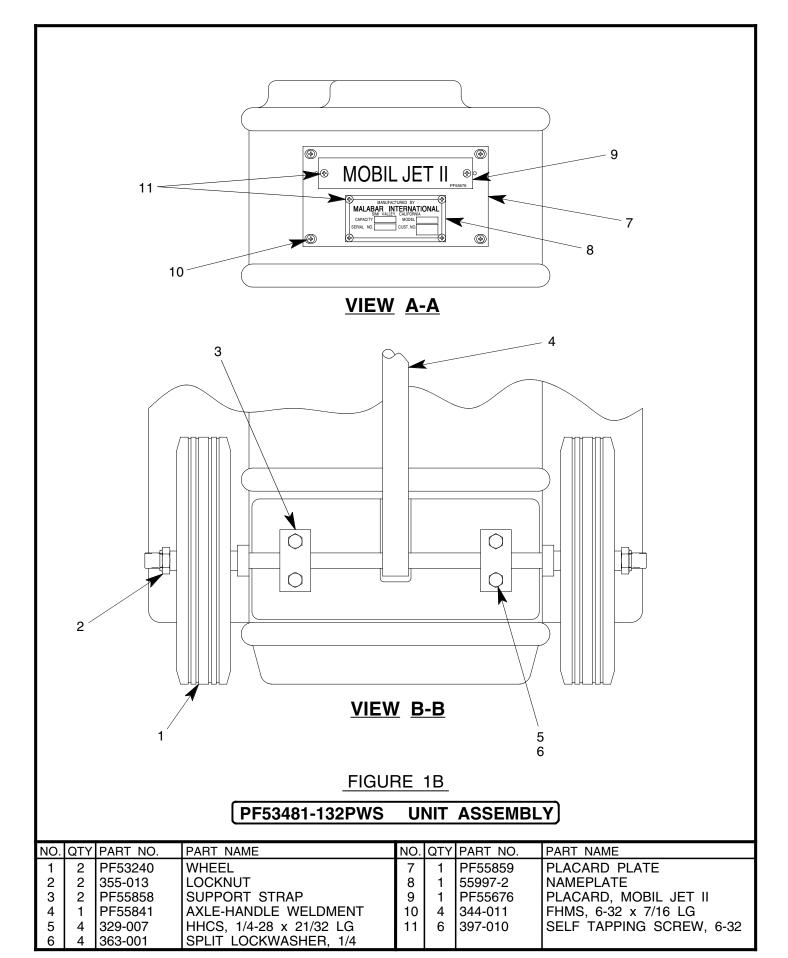

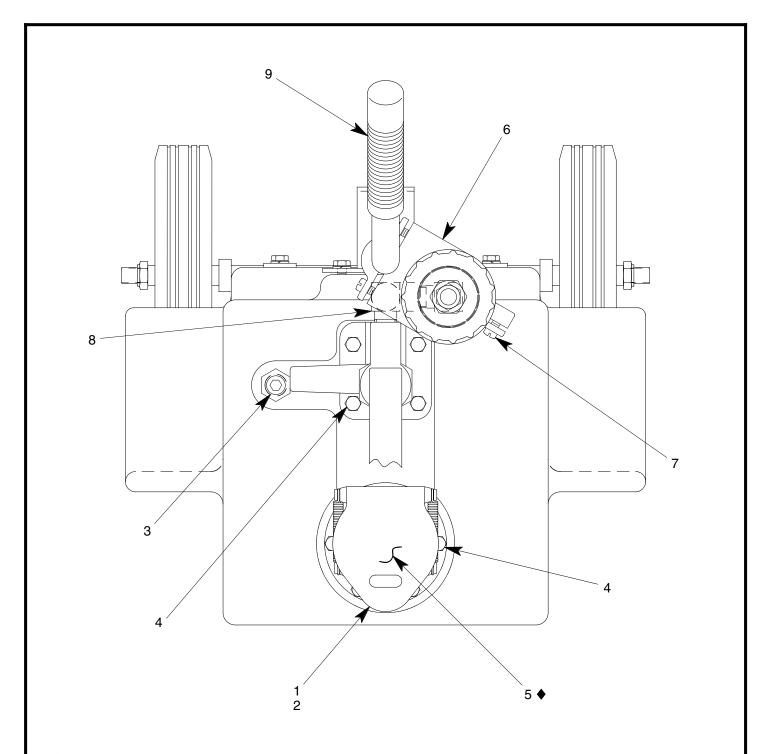



## **♦ PART OF REPAIR PARTS KIT**

FIGURE 1C

PF53481-132PWS	UNIT ASSEMBLY
----------------	---------------

NO.	QTY	PART NO.	PART NAME	NO.	QTY	PART NO.	PART NAME
1	1	PF53549	FILLPORT ASSEMBLY	6	1	PF55871-2	YOKE CLAMP
2	1	PF53628	GASKET, FILLPORT	7	3	342-010	SCREW, FIL HD, 1/4-20 x 1" LG
3	1	717-007	PLUG, 3/8 NPT	8	1	712-017	ELBOW, STREET, 3/8 NPT
4	10	329-007	HHCS, 1/4-28 x 21/32 LG	9	1	494-006	HANDLE GRIP
5	1	55925-329	O-RING				

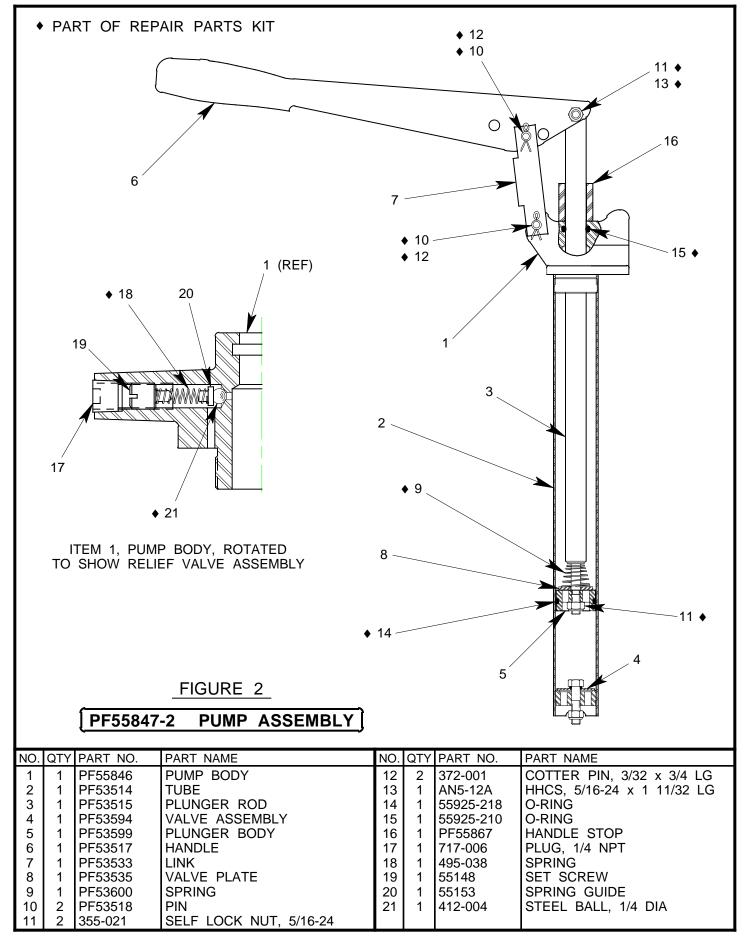

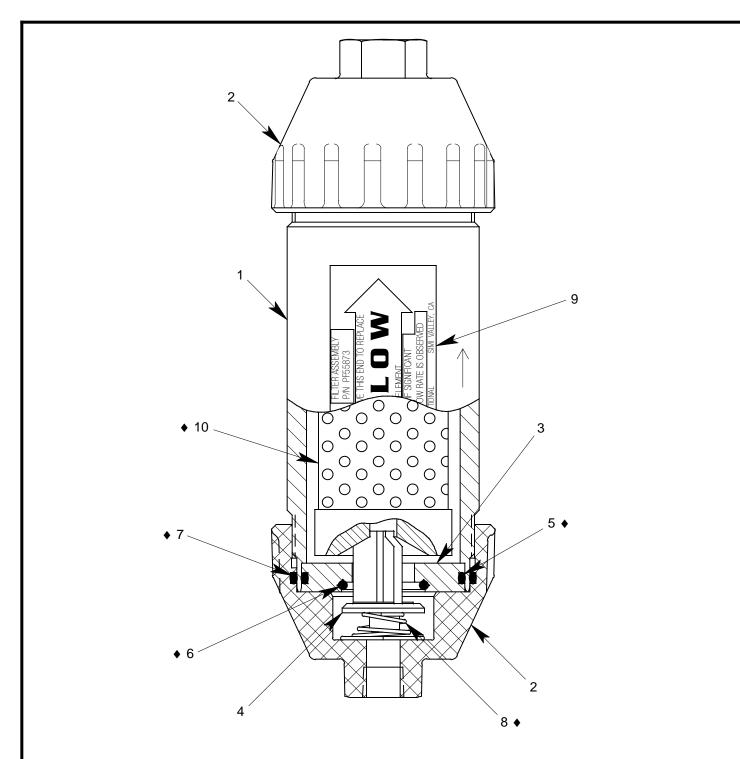

◆ PART OF REPAIR PARTS KIT

FIGURE 3

## PF55873 FILTER ASSEMBLY

NO.	QTY	PART NO.	PART NAME	NO.	QTY	PART NO.	PART NAME
1	1	PF55849	FILTER HOUSING	6	1	55925-120	O-RING
2	2	PF55852	FILTER HOUSING END CAP	7	2	55925-140	O-RING
3	1	PF55853	RETAINER DISC	8	1	495-039	SPRING
4	1	PF55850	RETAINER VALVE	9	1	PF55872	DECAL, FLOW
5	1	55925-135	O-RING	10	1	481-068	FILTER ELEMENT

### PF5-6PK REPAIR PARTS KIT QTY PART NO. PART NAME PF55456 HOSE ASSEMBLY 55925-329 O-RING PUMP GASKET PF53602 1 PF53600 **SPRING** PF53518 PIN SELF LOCK NUT, 5/16-24 355-021 2 372-001 COTTER PIN, 3/32 DIA x 3/4 LG AN5-12A HHCS, 5/16-24 x 1 11/32 LG 55925-218 O-RING 1 55925-210 **O-RING** 1 **SPRING** 495-038 412-004 STEEL BALL, 1/4 DIA 1 55925-135 **O-RING** 1 55925-120 **O-RING** 2 55925-140 **O-RING SPRING** 1 495-039 481-068 FILTER ELEMENT 1 PF5-6PKDOC REPAIR PARTS KIT LIST